

## Wiring Guideline for CP-FC3-2 LED Connector System ( Constant Voltage Connection )

Input

Rated Voltage: 0-42V DC;

Rated Current: Max. 9A;

Wire Capacity: 0.34-0.75mm<sup>2</sup>

0.5-0.75mm<sup>2</sup>

rigid / tin-bonded flexible conductor or  
flexible conductor with cooper sleeve

Output


Rated Voltage: 0-42V DC;

Rated Current: Max.1.5A;

Wire Capacity: 0.2-0.75mm<sup>2</sup>

0.5mm<sup>2</sup>

rigid / tin-bonded flexible conductor or  
flexible conductor with cooper sleeve.

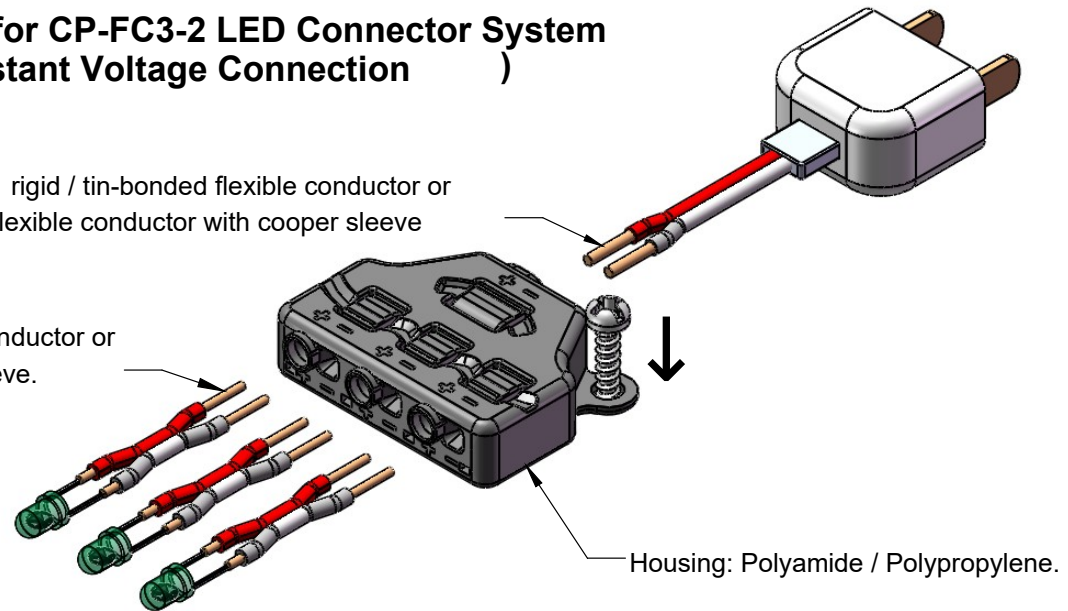

### CP-FC3-2 Constant Voltage Connection

