

Wiring Guideline for CP-FC6-2 LED Connector System (Constant Voltage Connection)

Input

Rated Voltage: 0-42V DC;

Rated Current: Max. 9A;

Wire Capacity: 0.34-0.75mm²

0.5-0.75mm²

rigid / tin-bonded flexible conductor or
flexible conductor with cooper sleeve

Output


Rated Voltage: 0-48V DC;

Rated Current: Max. 1.5A;

Wire Capacity: 0.2-0.75mm²

0.5mm²

rigid / tin-bonded flexible conductor or
flexible conductor with cooper sleeve

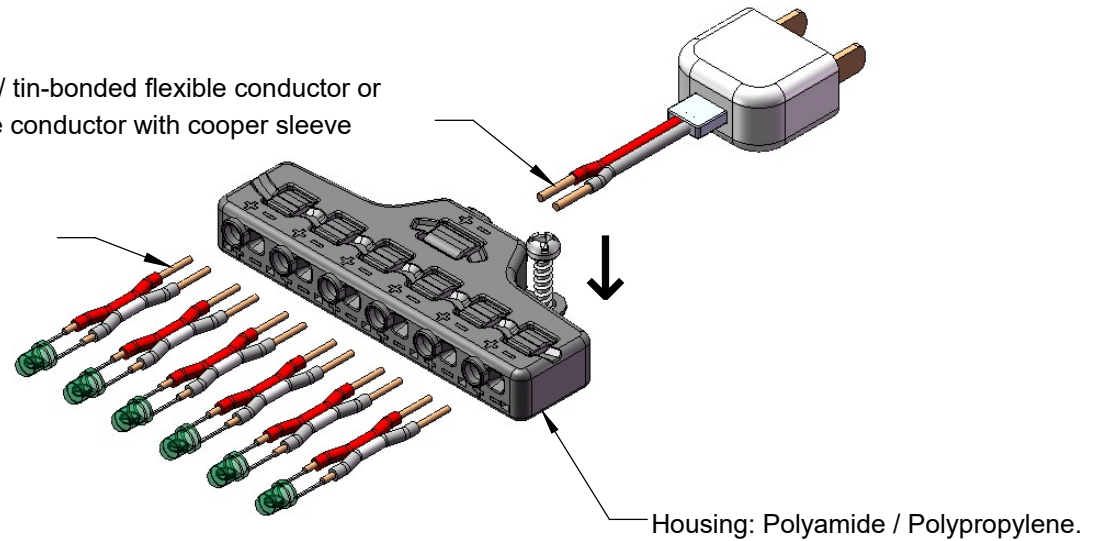

CP-FC6-2
Constant Voltage Connection

