

## Mini Series


## Constant Voltage LED Driver

LED恒压驱动器

## Features:

- Super compact design
- Driver for built-in use
- Primary and secondary sides come with leads
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV equivalent
- Protection class II
- IP65 design

- 紧凑型设计
- 内置式驱动
- 输入和输出端引线型
- 输出开路, 短路, 过载和超温保护
- 安装经济便捷
- 符合安全特低电压标准
- 保护等级 II
- 防护等级IP65

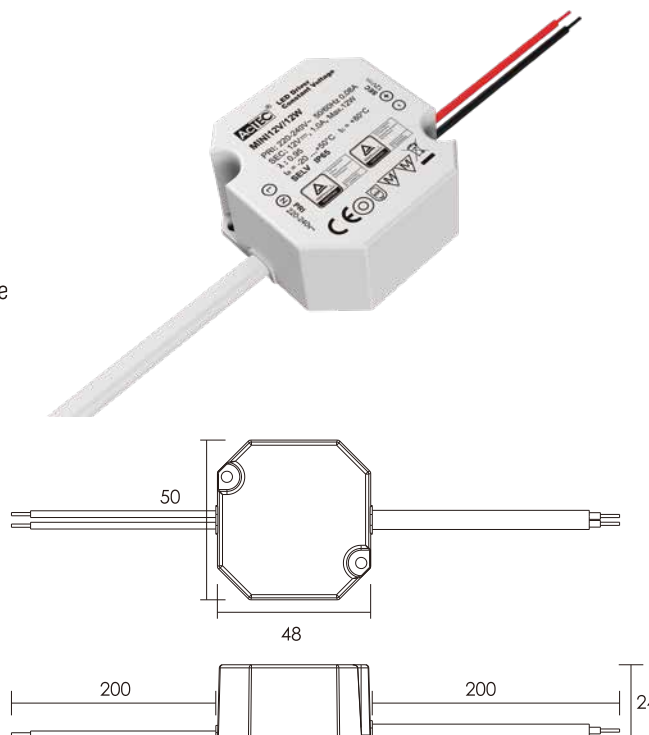

## Parameters:

| Model No.<br>型号 | Input voltage<br>额定电压<br>(V) | Max. output<br>功率<br>(W) | Output voltage<br>输出电压<br>(V) | Output current<br>输出电流<br>(A) | Power factor<br>功率因数<br>(λ) | Efficiency full load<br>效率<br>(%) | No-load power<br>空载功率<br>(W) | Ambient temperature<br>环境温度<br>ta (°C) | Max. casing temperature<br>最大外壳温度<br>tc (°C) | Isolation<br>隔离 | Dimensions<br>LxWxH<br>尺寸<br>(mm) | Weight<br>重量<br>(g) |
|-----------------|------------------------------|--------------------------|-------------------------------|-------------------------------|-----------------------------|-----------------------------------|------------------------------|----------------------------------------|----------------------------------------------|-----------------|-----------------------------------|---------------------|
| MINI12V/12W     | 220-240                      | 12                       | 12                            | 0-1.0                         | 0.95                        | 80                                | <0.5                         | -20...+50                              | 80                                           | SELV            | 50x48x24                          | 92                  |
| MINI24V/12W     | 220-240                      | 12                       | 24                            | 0-0.5                         | 0.95                        | 82                                | <0.5                         | -20...+50                              | 80                                           | SELV            | 50x48x24                          | 92                  |



CB CE IP65