





LLP-DW04-06

Available in 3m for LED strips up to 15 mm width


COVERS




INSTALLATION

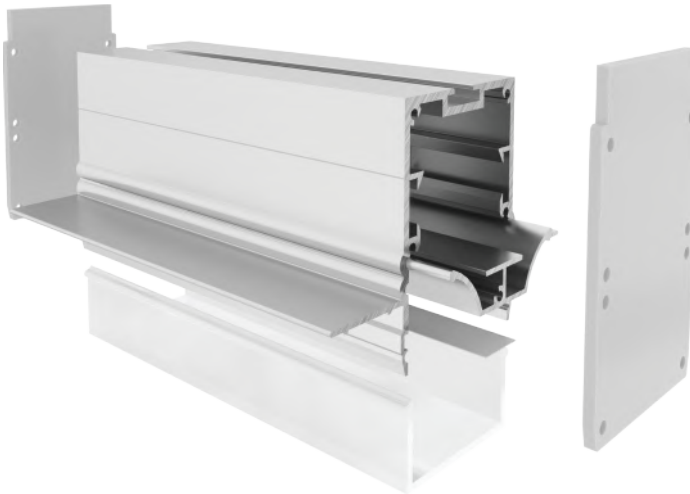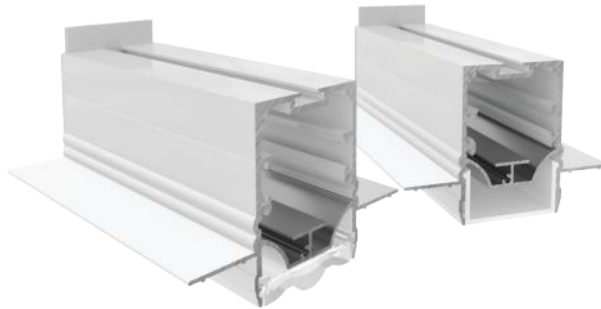

Photometric curves carried out
changing the position of lower cover

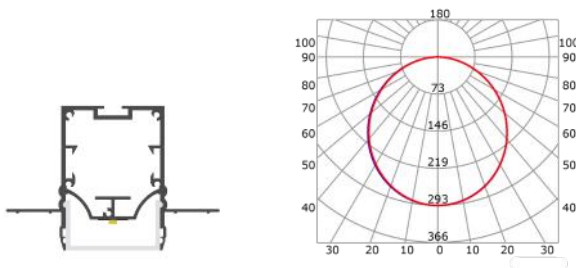


— C0-C180 — C90-C270
Flat opal cover: -41%
Flat frosted cover: -41%

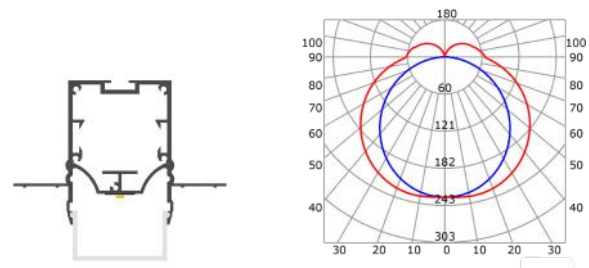


— C0-C180 — C90-C270
Outside opal cover: -32%
Outside frosted cover: -32%

Photometric curves carried out using the lens covers

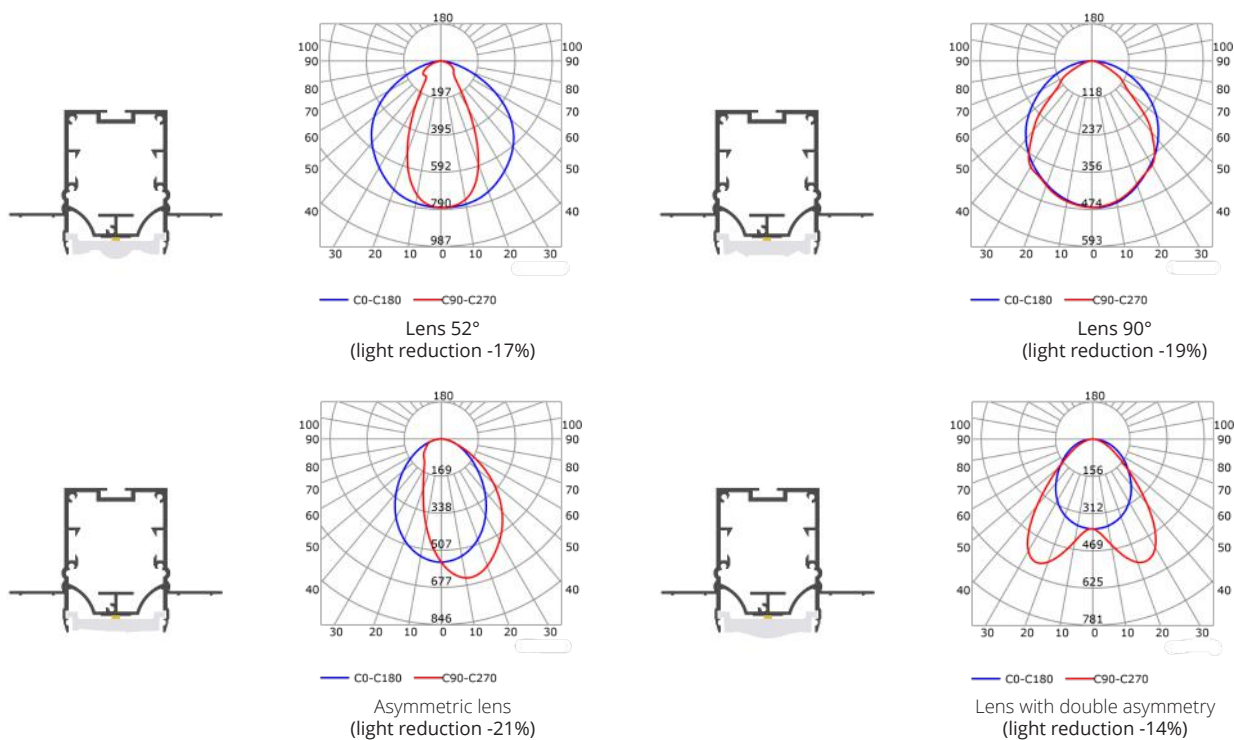

INSTALLATION



END CAPS

MOUNTING CLIPS



Article	Description	Length	Material	Color	Picture	Packaging
LLP-DW04-06-W3	Drywall profile	3m	Painted aluminium	White		-
LLP-HS05-00-S3	Heatsink	3m	Anodized aluminium	Silver		-
LLD-06-CM3	Opal cover	3m	Polycarbonate	-		30 pcs
LLD-06-CS3	Frosted cover	3m	Polycarbonate	-		30 pcs
LLD-06-XK1-L1	Lens 52°	1.176 m	Polycarbonate	-		-
LLD-06-XK1-L2	Lens 90°	1.176 m	Polycarbonate	-		-
LLD-06-XK1-L3	Asymmetric lens	1.176 m	Polycarbonate	-		-
LLD-06-XK1-L4	Lens with double asymmetry	1.176 m	Polycarbonate	-		-
LLE-DW04-SM-U	End cap	-	Aluminium	Silver	A	-
LLM-AC01-M	Straight connector	-	Metal	-	B	-
LLM-AC02-M	120° horizontal connector	-	Metal	-	C	-
LLM-AC03-M	90° horizontal connector	-	Metal	-	D	-
LLM-AC04-M	90° vertical connector	-	Metal	-	E	-