

Side lighting Injection Module

ModD-300-01EP1 / ModD-600-01EP1



Areas of application

- Signage and illuminated advertising.
- Best for 120~300mm depth double side light boxes.
- Permanent outdoor use in enclosed light boxes.

Product features

- Chain of 20 LED modules with single LED each.
- High efficiency LED.
- High color consistency (MacAdam 4).
- Beam characteristic: 18 x 40°.
- Protection class of LED module: IP66.
- Flexible chain, can be split between any module.
- Mounting with screw or remounted double-sided adhesive tape possible.
- Fully integrated heat sink.
- Nominal life-time up to 50,000 h (at t_c 50°C).
- Module size: 38 x 30 x 14 mm.

Application data

Module number per Chain	20 pcs
Max. module number per Chain	20 pcs
Distance of modules (wire)	150 mm
Ambient temperature t_a	-25 ~ +50 °C
Max. temperature on module t_c	65 °C
Storage temperature t_s	-40 ~ +85 °C
Risk group (EN 62471:2008)	1
Certification list	CE/ENEC/RoHS

Technical data


Product Name	Nominal voltage ^③	Color temperature or Wavelength ^{①②}	CRI ^{①②}	Typ. Flux per module ^{①②}	Typ. Power per module ^{①②}	Luminous efficacy
ModD-300-01EP1	12.0 V	2700~3300 K	>70	185 lm	2.4 W	77.1 lm/W
ModD-400-01EP1	12.0 V	3800~4300 K	>70	200 lm	2.4 W	83.3 lm/W
ModD-600-01EP1	12.0 V	6000~7000 K	>70	200 lm	2.4 W	83.3 lm/W

① Tolerance range for optical and electrical data: -15/+15 %.

② All value @ $t_a=25^\circ\text{C}$.

③ Tolerance range for the supply voltage: 12 V: $\pm 5\%$


Product 2D drawing (unit: mm)

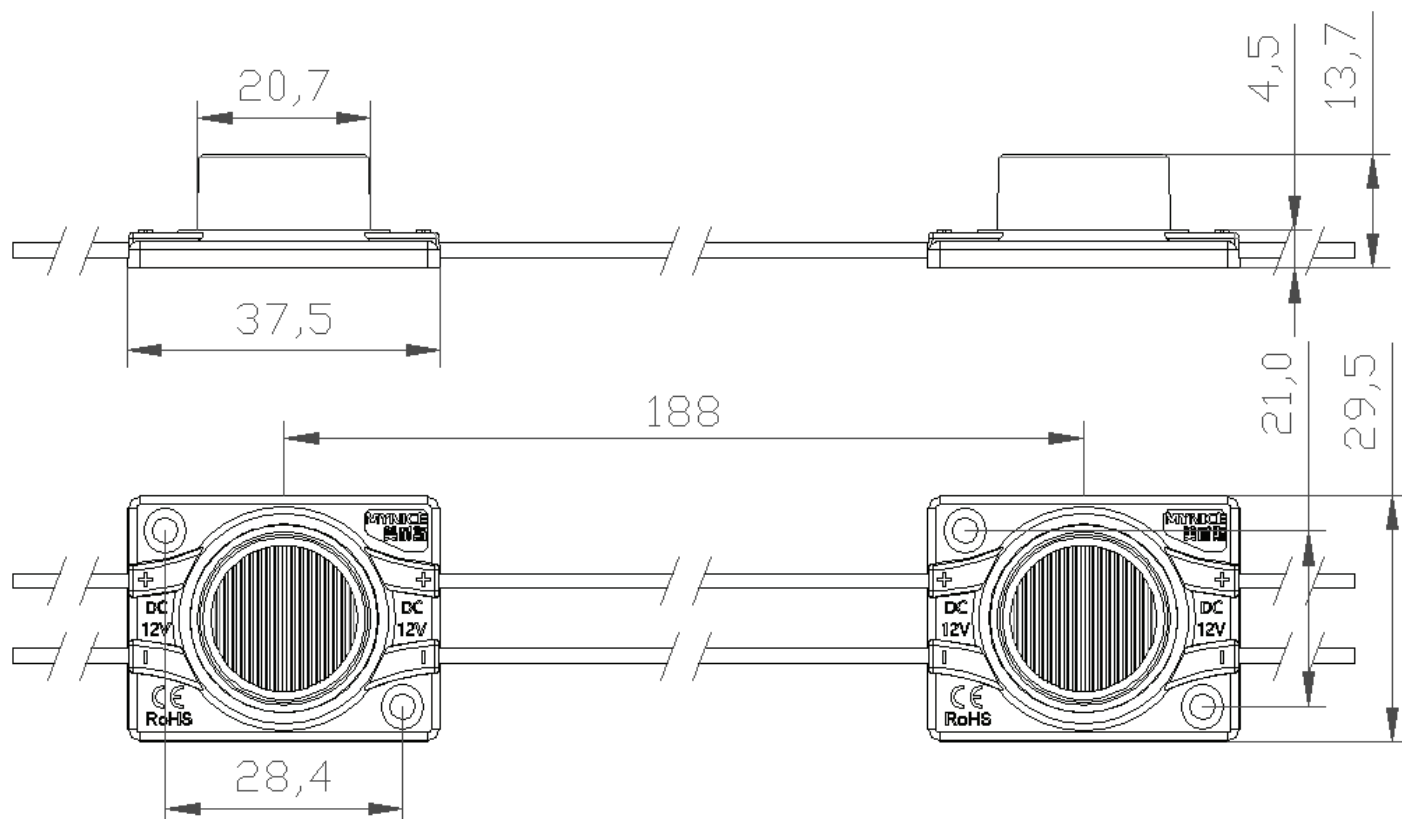

Wiring type


Cable	UL 1007 20AWG	
Color	red - white	white
Function	+	-

Wiring example:

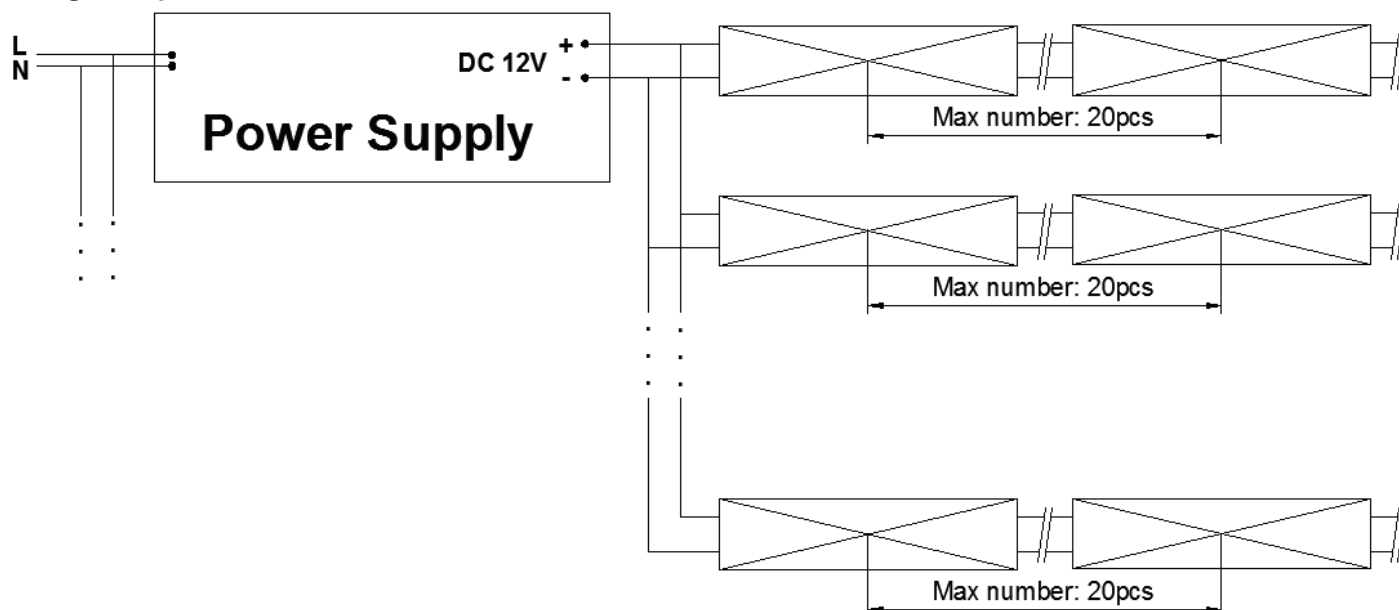

Light distribution

Beam characteristics 18 x 40°

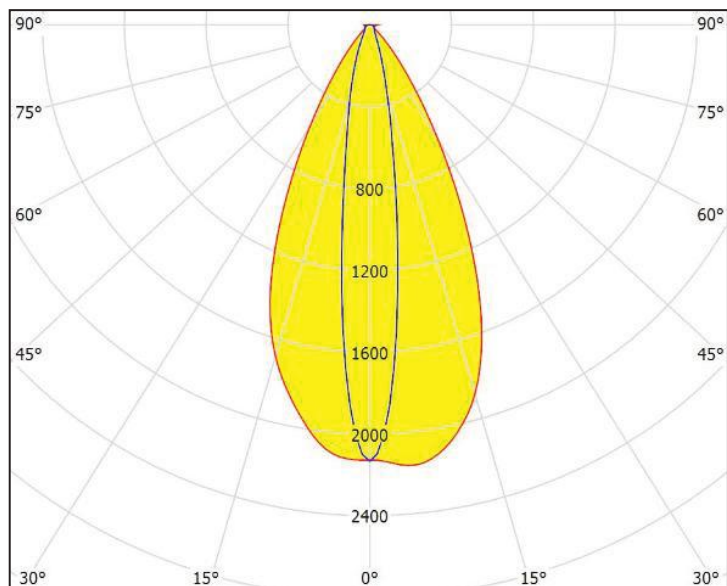

Noted:

- The power cable should meet the actual maximum current and power.
- All the end point of wire should be treated with waterproof;
- Pay attention to the maximum number of connections, prohibit overloading.
- All the power supply must has the corresponding certification.
- Our company reserves the right of final interpretation.
- Subject to change without notice.