


OR3s4s-F52-240D22

Electronic features



www.orizzonteled.com
info@orizzonteled.com

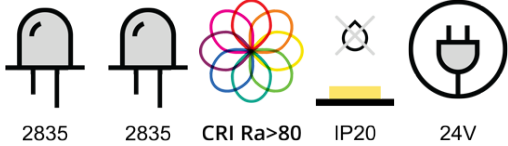


Technical parameters

LED Type	2835 Honglitrionic + 2835 Honglitrionic
LED/m	240 (120+120)
Voltage range	24V
Max power (24.0V)	14,4 W/m
Led color binning	3step MacAdam
Useful life span	50000h
Operating current (single LED)	60mA
Copper thickness	105 µm
Operating temperature	-10°C ~ +50°C
Max led temperature	75°C
IP rate	IP20
Emitting angle	120°

Lighting parameters

CCT		Lm/m	Lm/W	Energy rating
3000-3000K	CRI Ra>80, 81 Rf, 97 Rg	1630	115	E
4000-4000K	CRI Ra>80, 80 Rf, 92 Rg	1770	125	E

Dimensions

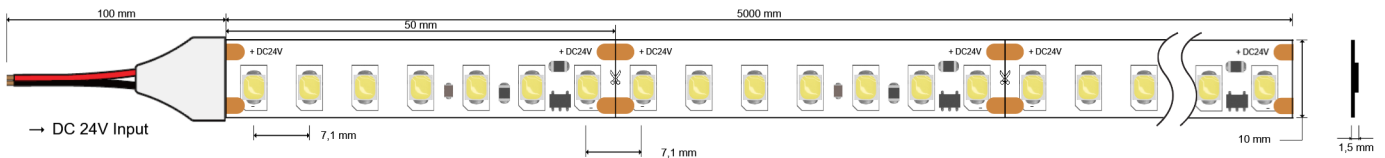

Specifications

PCB width	10 mm
Led strip height	1,5 mm
Cutting unit 24V	50 mm (6+6 led)
LED Pitch	7,14 mm
Reel length	5 m
Adhesive tape	<u>3M 9495LE</u>
Cable cross-section	0,75 mm ²

OR3s4s-F52-240D22

Product Range

Version	Temperature	IP type	Strip length	PCB colour	Led/m	LED type	Manufacturer No.	Input voltage	Misc.
OR	3s4s	F	5	2	240	D	2	2	

Packaging

Technical parameters

Carton dimension	520 x 170 x 330 mm
Quantity per carton	50
Net weight	113 g
Gross weight	138 g



5 meters per carton roll



1 roll per carton box

250 m per carton

Orizzonte uses paper boxes and reels for its LED strips to fight for a plastic free world.

Certifications

