



OR400-FA2-384OR1A-W5

Electronic features

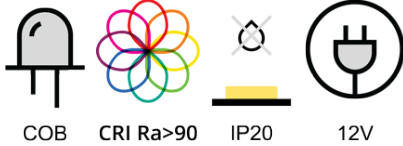


Technical parameters	
LED Type	0620
LED/m	384
Voltage range	12V
Max power (24.0V)	8,6 W/m
Led color binning	5step MacAdam
Useful life span	20000h
Operating current (single LED)	15mA
Copper thickness	70 µm
Operating temperature	-10°C ~ +45°C
Max led temperature	65°C
IP rate	IP20
Emitting angle	120°

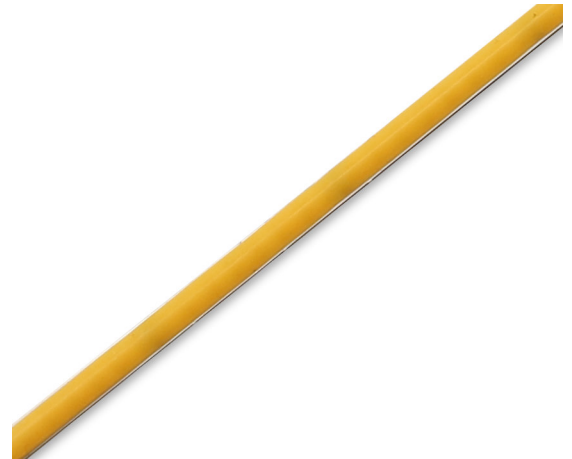

Lighting parameters						
CCT	CRI	Rf	Rg	Lm/m	Lm/W	Energy rating
4000K (400)	CRI Ra>90	87	96	840	109	F

Dimensions

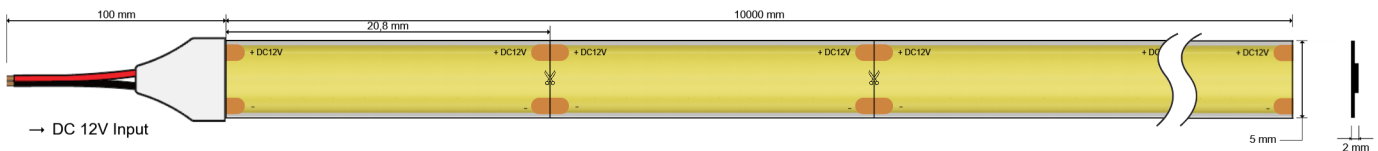

Specifications	
PCB width	5 mm
Led strip height	2 mm
Cutting unit 12V	20,8 mm (8 led)
LED Pitch	2 mm
Reel length	10 m
Adhesive tape	<u>3M 9495LE</u>
Cable cross-section	0,75 mm ²

OR400-FA2-384OR1A-W5

Product Range

Version	Temperature	IP type	Strip length	PCB colour	Led/m	LED type	Manufacturer No.	Input voltage	Misc.
OR	400	F	A	2	384	O	R	1	A-W5

Packaging

Technical parameters

Carton dimension	380 x 330 x 190 mm
Quantity per carton	20
Net weight	146 g
Gross weight	160 g



10 meters per carton roll



1 roll per carton box

200 m per carton

Orizzonte uses paper boxes and reels for its LED strips to fight for a plastic free world.

Certifications

