


ORCCT-F52-156821-W5

Electronic features



www.orizzonteled.com
info@orizzonteled.com

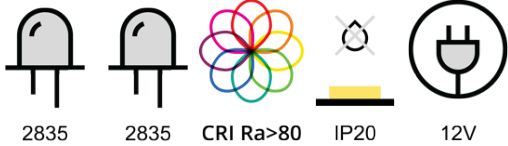


Technical parameters

LED Type	2835 Honglitrionic + 2835 Honglitrionic
LED/m	156 (78+78)
Voltage range	12V
Max power (24.0V)	5,5 W/m
Led color binning	3step MacAdam
Useful life span	50000h
Operating current (single LED)	35mA
Copper thickness	105 µm
Operating temperature	-10°C ~ +50°C
Max led temperature	75°C
IP rate	IP20
Emitting angle	120°

Lighting parameters

CCT		Lm/m	Lm/W	Energy rating
2700-2700K	CRI Ra>80, 80 Rf, 88 Rg	610	116	E
6500-6500K	CRI Ra>80	660	130	E

Dimensions

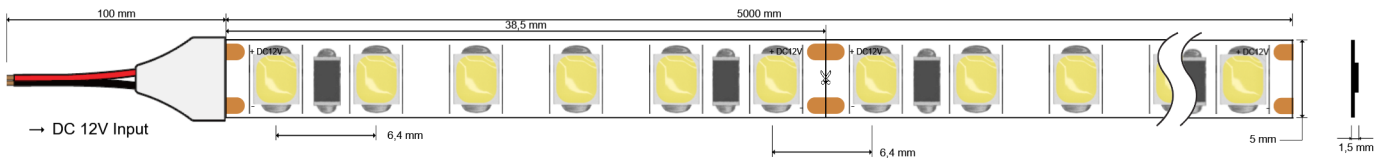

Specifications

PCB width	5 mm
Led strip height	1,5 mm
Cutting unit 12V	38,5 mm (3+3 led)
LED Pitch	6,43 mm
Reel length	5 m
Adhesive tape	<u>3M 9495LE</u>
Cable cross-section	0,75 mm ²

ORCCT-F52-156821-W5

Product Range

Version	Temperature	IP type	Strip length	PCB colour	Led/m	LED type	Manufacture r No.	Input voltage	Misc.
OR	CCT	F	5	2	156	8	2	1	-W5

Packaging

Technical parameters

Carton dimension	520 x 330 x 170 mm
Quantity per carton	50
Net weight	30 g
Gross weight	70 g



5 meters per carton roll



1 roll per carton box

250 m per carton

Orizzonte uses paper boxes and reels for its LED strips to fight for a plastic free world.

Certifications

