


ORCCT-F52-2568U4A

Electronic features




Technical parameters	
LED Type	2835
LED/m	256 (128+128)
Voltage range	48V
Max power (24.0V)	26 W/m
Led color binning	3step MacAdam
Useful life span	50000h
Operating current (single LED)	135mA
Copper thickness	70 µm
Operating temperature	-10°C ~ +45°C
Max led temperature	70°C
IP rate	IP20
Emitting angle	120°

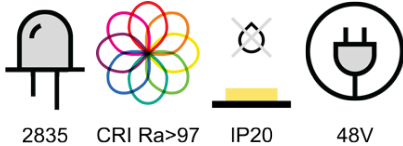

Lighting parameters						
CCT	CRI	Rf	Rg	Lm/m	Lm/W	Energy rating
2700-5000K (CCT)	CRI Ra>97	95	101			E

Dimensions

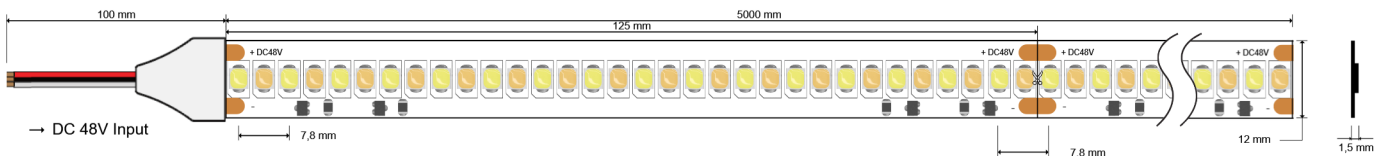

Specifications	
PCB width	12 mm
Led strip height	1,5 mm
Cutting unit 48V	125 mm (16+16 led)
LED Pitch	7,8 mm
Reel length	5 m
Adhesive tape	<u>3M 9495LE</u>
Cable cross-section	0,75 mm ²

ORCCT-F52-2568U4A

Product Range

Version	Temperature	IP type	Strip length	PCB colour	Led/m	LED type	Manufacturer No.	Input voltage	Misc.
OR	CCT	F	5	2	256	8	U	4	A

Packaging

Technical parameters

Carton dimension	520 x 170 x 330 mm
Quantity per carton	50
Net weight	110 g
Gross weight	150 g



5 meters per carton roll



1 roll per carton box

250 m per carton

Orizzonte uses paper boxes and reels for its LED strips to fight for a plastic free world.

Certifications

