


# ORR40s-K52-140H12

## Electronic features

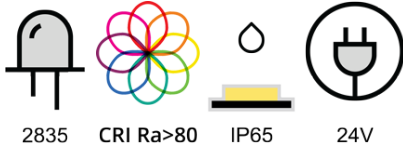

### Technical parameters


LED Type	2835 Honglitronic
LED/m	140 (70+70)
Voltage range	24V
Max power (24.0V)	14,4 W/m
Useful life span	50000h
Operating current (single LED)	120mA
Copper thickness	70 µm
Operating temperature	-10°C ~ +50°C
Max led temperature	75°C
IP rate	IP65
Emitting angle	120°



### Lighting parameters

CCT	CRI	Rf	Rg	Lm/m	Lm/W	Energy rating
4000K 3step (R40s)	CRI Ra>80			525	41	

## Dimensions

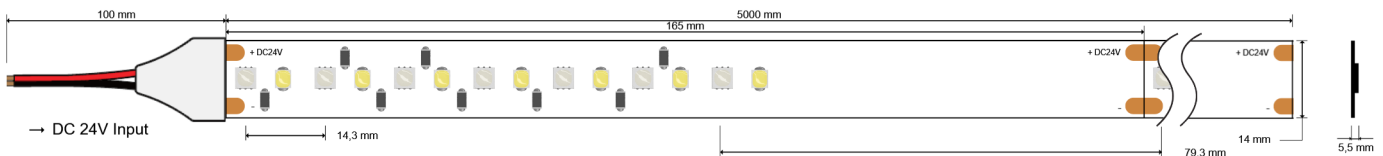

### Specifications

PCB width	14 mm
Led strip height	5,5 mm
Cutting unit 24V	165 mm (7+7 led)
LED Pitch	14,28 mm
Reel length	5 m
Adhesive tape	3M 5604A VHB
Cable cross-section	0,75 mm <sup>2</sup>

# ORR40s-K52-140H12

## Product Range

Version	Temperature	IP type	Strip length	PCB colour	Led/m	LED type	Manufacturer No.	Input voltage	Misc.
OR	R40s	K	5	2	140	H	1	2	

## Packaging

### Technical parameters

Carton dimension	525 x 215 x 430 mm
Quantity per carton	50
Net weight	370 g
Gross weight	430 g



5 meters per carton roll



1 roll per carton box

250 m per carton

Orizzonte uses paper boxes and reels for its LED strips to fight for a plastic free world.

## Certifications

