


ORRGB-K252-0968ZH

Electronic features

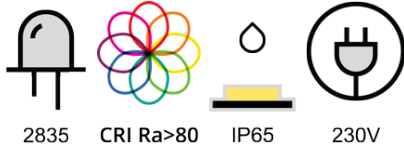

Technical parameters

LED Type	2835
LED/m	96
Voltage range	230V
Max power (24.0V)	11 W/m
Useful life span	50000h
Operating current (single LED)	24mA
Copper thickness	70 µm
Operating temperature	-10°C ~ +50°C
Max led temperature	75°C
IP rate	<u>IP65</u>
Emitting angle	120°



Lighting parameters

CCT	CRI	Rf	Rg	Lm/m	Lm/W	Energy rating
RGB (RGB)	CRI Ra>80	95	100	235	24	

Dimensions

Specifications

PCB width	12 mm
Led strip height	5 mm
Cutting unit 230V	500 mm (48 led)
Reel length	25 m
Adhesive tape	<u>3M 9495LE</u>
Cable cross-section	0,75 mm ²

ORRGB-K252-0968ZH

Product Range

Version	Temperature	IP type	Strip length	PCB colour	Led/m	LED type	Manufacturer No.	Input voltage	Misc.
OR	RGB	K	2	5	209	6	8	Z	H

Packaging

Technical parameters

Carton dimension	420 x 420 x 360 mm
Quantity per carton	2
Net weight	3000 g
Gross weight	3800 g



25 meters per carton roll



1 roll per carton box

50 m per carton

Orizzonte uses paper boxes and reels for its LED strips to fight for a plastic free world.

Certifications

