



# ORxxx-F52-036822A

## Electronic features

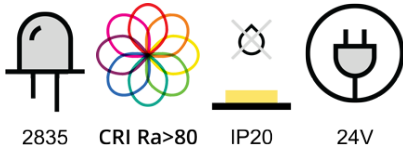

### Technical parameters


LED Type	2835 Honglitronic
LED/m	36
Voltage range	24V
Max power (24.0V)	8,6 W/m
Led color binning	3step MacAdam
Useful life span	50000h
Operating current (single LED)	60mA
Copper thickness	70 µm
Operating temperature	-10°C ~ +50°C
Max led temperature	75°C
IP rate	IP20
Emitting angle	120°

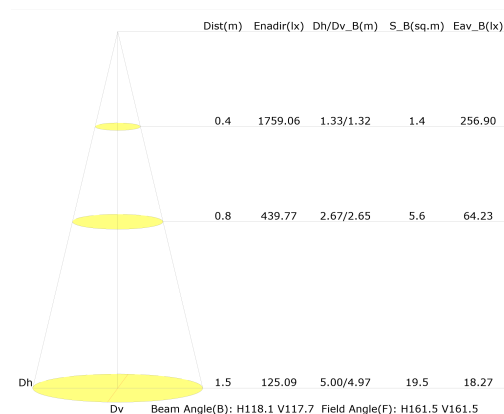

### Lighting parameters

CCT	CRI	Rf	Rg	Lm/m	Lm/W	Energy rating
3000K 3step (30s)	CRI Ra>80	81	97	850	110	F
4000K 3step (40s)	CRI Ra>80	80	92	920	119	E
6000-6500K (600)	CRI Ra>80	81	93	850	110	F

## Dimensions

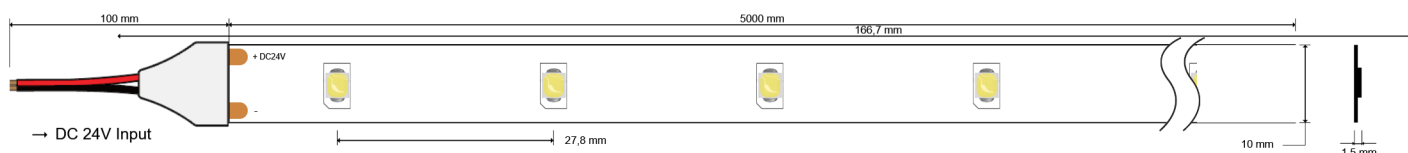

### Specifications

PCB width	10 mm
Led strip height	1,5 mm
Cutting unit 24V	166,7 mm (6 led)
LED Pitch	27,78 mm
Reel length	5 m
Adhesive tape	3M 9495LE
Cable cross-section	0,75 mm <sup>2</sup>

# ORxxx-F52-036822A

## Product Range

Version	Temperature	IP type	Strip length	PCB colour	Led/m	LED type	Manufacturer No.	Input voltage	Misc.
OR	30S	F	5	2	036	8	2	2	A
OR	40s	-	F	5	2-0	3	6	8	22A
OR	600	F	5	2	036	8	2	2	A

## Packaging

### Technical parameters

Carton dimension	520 x 170 x 330 mm
Quantity per carton	50
Net weight	55 g
Gross weight	100 g



5 meters per carton roll



1 roll per carton box

250 m per carton

Orizzonte uses paper boxes and reels for its LED strips to fight for a plastic free world.

## Certifications

