



# ORxxx-F52-0608F1

## Electronic features

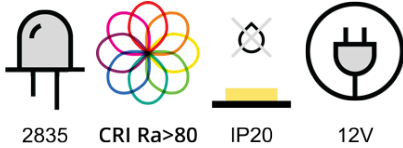


Technical parameters	
LED Type	2835
LED/m	60
Voltage range	12V
Max power (24.0V)	14,4 W/m
Led color binning	3step MacAdam
Useful life span	50000h
Operating current (single LED)	60mA
Copper thickness	70 $\mu$ m
Operating temperature	-10°C ~ +45°C
Max led temperature	70°C
IP rate	IP20
Emitting angle	120°

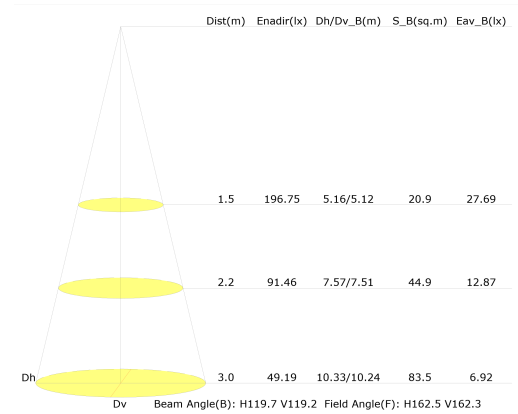

Lighting parameters						
CCT	CRI	Rf	Rg	Lm/m	Lm/W	Energy rating
4000K 3step (40s)	CRI Ra>80			1450	112	F
6500K 3 step (65s)	CRI Ra>80			1350	104	F

## Dimensions

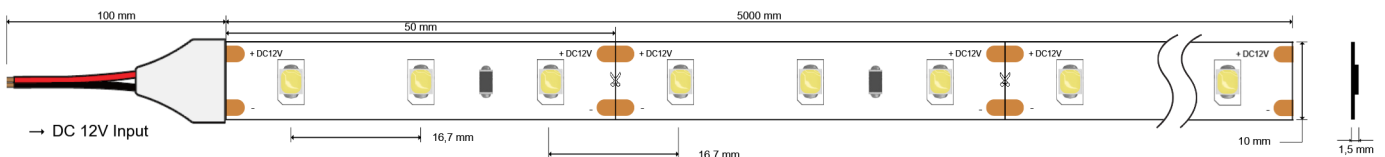

Specifications	
PCB width	10 mm
Led strip height	1,5 mm
Cutting unit 12V	50 mm (3 led)
LED Pitch	16,67 mm
Reel length	5 m
Adhesive tape	3M 9495LE
Cable cross-section	0,75 mm <sup>2</sup>

# ORxxx-F52-0608F1

## Product Range

Version	Temperature	IP type	Strip length	PCB colour	Led/m	LED type	Manufacturer No.	Input voltage	Misc.
OR	40s	F	5	2	060	8	F	1	
OR	65s	F	5	2	060	8	F	1	

## Packaging

### Technical parameters

Carton dimension	520 x 170 x 330 mm
Quantity per carton	50
Net weight	80 g
Gross weight	125 g



5 meters per carton roll



1 roll per carton box

250 m per carton

Orizzonte uses paper boxes and reels for its LED strips to fight for a plastic free world.

## Certifications

