

ORxxx-F52-140822-W6

Electronic features



www.orizzonteled.com
info@orizzonteled.com




Technical parameters

LED Type	2835 Honglitronic
LED/m	140
Voltage range	24V
Max power (24.0V)	11 W/m
Led color binning	3step MacAdam
Useful life span	50000h
Operating current (single LED)	23mA
Copper thickness	105 µm
Operating temperature	-10°C ~ +50°C
Max led temperature	75°C
IP rate	IP20
Emitting angle	120°

Lighting parameters

CCT	CRI	Rf	Rg	Lm/m	Lm/W	Energy rating
3000K 3step (30s)	CRI Ra>80	81	97	1400	141	E
4000K 3step (40s)	CRI Ra>80	80	92	1450	146	D
6000K 3step (600)	CRI Ra>80	81	93	1500	152	D

Dimensions

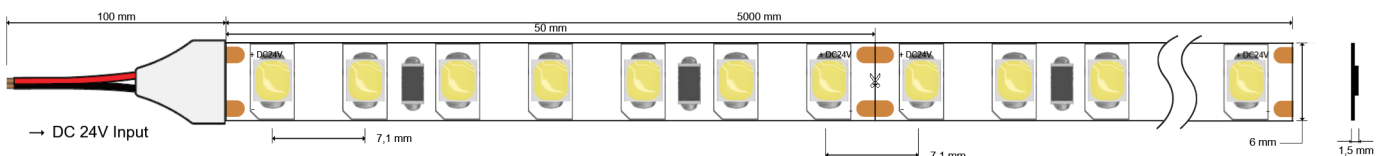

Specifications

PCB width	6 mm
Led strip height	1,5 mm
Cutting unit 24V	50 mm (7 led)
LED Pitch	7,14 mm
Reel length	5 m
Adhesive tape	3M 9495LE
Cable cross-section	0,75 mm ²

ORxxx-F52-140822-W6

Product Range

Version	Temperature	IP type	Strip length	PCB colour	Led/m	LED type	Manufacturer No.	Input voltage	Misc.
OR	30s	F	5	2	140	8	2	2	-W6
OR	40s	F	5	2	140	8	2	2	-W6
OR	600	F	5	2	140	8	2	2	-W6

Packaging

Technical parameters

Carton dimension	520 x 170 x 330 mm
Quantity per carton	50
Net weight	45 g
Gross weight	75 g



5 meters per carton roll






1 roll per carton box

250 m per carton

Orizzonte uses paper boxes and reels for its LED strips to fight for a plastic free world.

Certifications

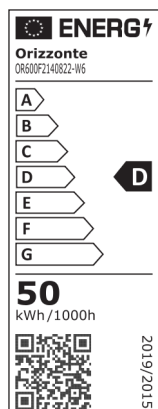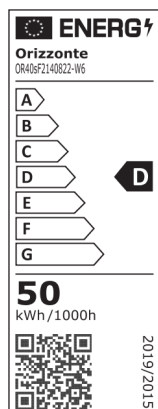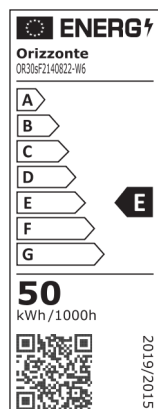

Data sheet

The data sheets provided are for reference only; data values are not guaranteed. Specifications are subject to change without notice.