


ORxxx-F52-240CA2-W3

Electronic features



www.orizzonteled.com
info@orizzonteled.com

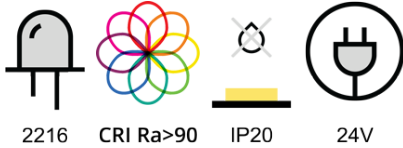


Technical parameters

LED Type	2216
LED/m	240
Voltage range	24V
Max power (24.0V)	5,5 W/m
Useful life span	50000h
Operating current (single LED)	6mA
Copper thickness	70 µm
Operating temperature	-10°C ~ +45°C
Max led temperature	75°C
IP rate	IP20
Emitting angle	120°

Lighting parameters

CCT	CRI	Rf	Rg	Lm/m	Lm/W	Energy rating
3050-3225K (300)	CRI Ra>90			425	86	G
3900-4250K (400)	CRI Ra>90			510	103	F

Dimensions

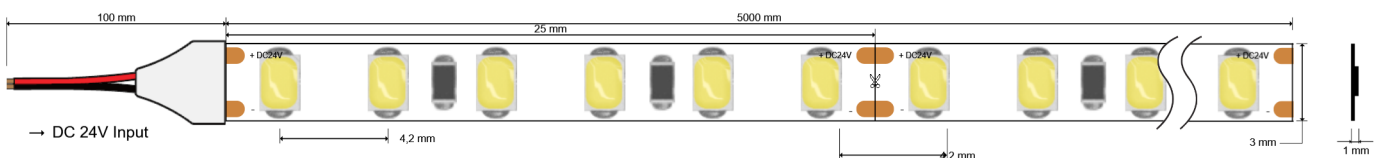

Specifications

PCB width	3 mm
Led strip height	1 mm
Cutting unit 24V	25 mm (6 led)
LED Pitch	4,17 mm
Reel length	5 m
Adhesive tape	3M 9495LE
Cable cross-section	0,5 mm²

ORxxx-F52-240CA2-W3

Product Range

Version	Temperature	IP type	Strip length	PCB colour	Led/m	LED type	Manufacturer No.	Input voltage	Misc.
OR	300	F	5	2	240	C	A	2	-W3
OR	400	F	5	2	240	C	A	2	-W3

Packaging

Technical parameters

Carton dimension	520 x 170 x 330 mm
Quantity per carton	50
Net weight	45 g
Gross weight	75 g



5 meters per carton roll



1 roll per carton box

250 m per carton

Orizzonte uses paper boxes and reels for its LED strips to fight for a plastic free world.

Certifications

