


ORxxx-F52-528OR2

Electronic features




www.orizzonteled.com
info@orizzonteled.com

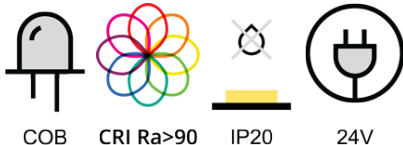

Technical parameters	
LED Type	0620
LED/m	528
Voltage range	24V
Max power (24.0V)	15,5 W/m
Led color binning	5step MacAdam
Useful life span	20000h
Operating current (single LED)	29mA
Copper thickness	70 µm
Operating temperature	-10°C ~ +45°C
Max led temperature	65°C
IP rate	IP20
Emitting angle	140°

Lighting parameters						
CCT	CRI	Rf	Rg	Lm/m	Lm/W	Energy rating
3000K (300)	CRI Ra>90	90	98	1590	114	F
6000K (600)	CRI Ra>90	94	104	1690	121	E

Dimensions

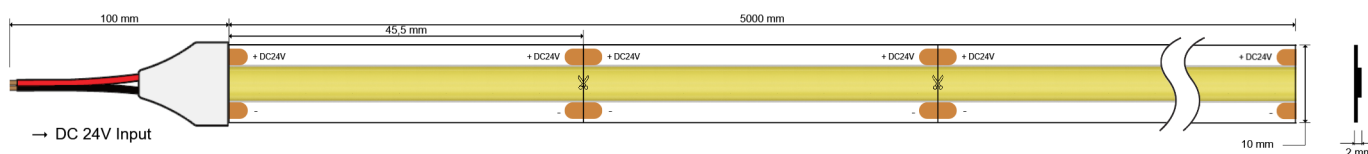

Specifications	
PCB width	10 mm
Led strip height	2 mm
Cutting unit 24V	45,5 mm (24 led)
LED Pitch	3 mm
Reel length	5 m
Adhesive tape	3M 9495LE
Cable cross-section	0,75 mm ²

Data sheet

ORxxx-F52-528OR2

Product Range

Version	Temperature	IP type	Strip length	PCB colour	Led/m	LED type	Manufacturer No.	Input voltage	Misc.
OR	300	F	5	2	528	O	R	2	
OR	600	F	5	2	528	O	R	2	

Packaging

Technical parameters

Carton dimension	520 x 170 x 330 mm
Quantity per carton	50
Net weight	119 g
Gross weight	130 g



5 meters per carton roll





1 roll per carton box

250 m per carton

Orizzonte uses paper boxes and reels for its LED strips to fight for a plastic free world.

Certifications

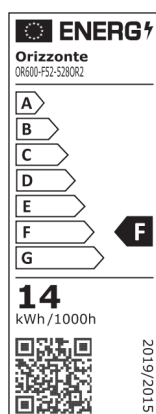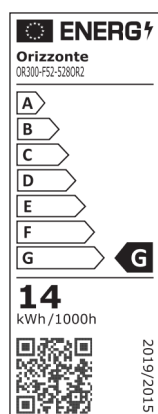

Data sheet

The data sheets provided are for reference only; data values are not guaranteed. Specifications are subject to change without notice.