

ORxxx-Fx2-x240DF2-25

Electronic features



2835 CRI Ra>80 IP20 24V




Orizzonte
LED Lighting

www.orizzonteled.com
info@orizzonteled.com

Technical parameters


LED Type	2835
LED/m	240
Voltage range	24V
Max power (24.0V)	20 W/m
Led color binning	3step MacAdam
Useful life span	50000h
Operating current (single LED)	28mA
Copper thickness	105 µm
Operating temperature	-10°C ~ +45°C
Max led temperature	70°C
IP rate	IP20
Emitting angle	120°

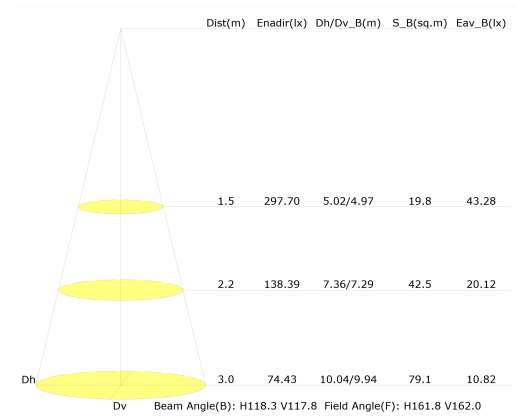

Lighting parameters

CCT	CRI	Rf	Rg	Lm/m	Lm/W	Energy rating
3000K 3step (30s)	CRI Ra>80	80	93	2850	158	D
4000K 3step (40s)	CRI Ra>80	81	95	2750	153	D

Dimensions

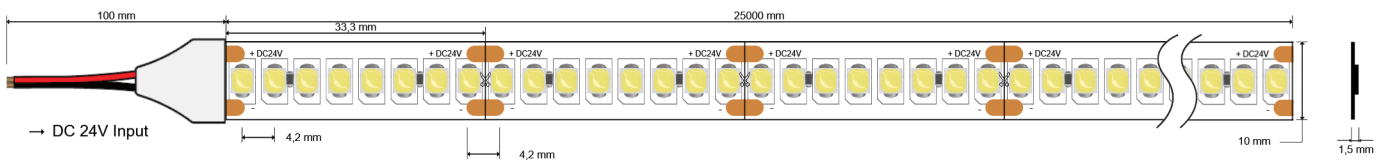

Specifications

PCB width	10 mm
Led strip height	1,5 mm
Cutting unit 24V	33,3 mm (8 led)
LED Pitch	4,16 mm
Reel length	25 m
Adhesive tape	3M 9495LE
Cable cross-section	0,75 mm ²

ORxxx-Fx2-x240DF2-25

Product Range

Version	Temperature	IP type	Strip length	PCB colour	Led/m	LED type	Manufacturer No.	Input voltage	Misc.
OR	30s	F	x	2	x240	D	F	2	-25
OR	40s	F	x	2	x240	D	F	2	-25

Packaging

Technical parameters

Carton dimension	330 x 330 x 400 mm
Quantity per carton	25
Net weight	300 g
Gross weight	500 g



25 meters per carton roll



1 roll per carton box

625 m per carton

Orizzonte uses paper boxes and reels for its LED strips to fight for a plastic free world.

Certifications

