


ORxxx-K252-13081H

Electronic features

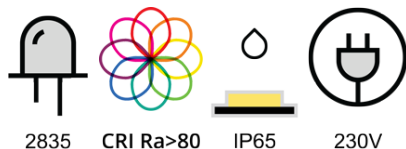

www.orizzonteled.com

info@orizzonteled.com

Technical parameters

LED Type	2835
LED/m	130
Voltage range	230V
Max power (24.0V)	17 W/m
Useful life span	50000h
Operating current (single LED)	7mA
Copper thickness	70 µm
Operating temperature	-10°C ~ +45°C
Max led temperature	75°C
IP rate	<u>IP65</u>
Emitting angle	120°



Lighting parameters

CCT	CRI	Rf	Rg	Lm/m	Lm/W	Energy rating
3000K (300)	CRI Ra>80	80	91	1700	111	E
4000K (400)	CRI Ra>80	84	91	1800	118	E

Dimensions



Specifications

PCB width	12 mm
Led strip height	4,5 mm
Cutting unit 230V	100 mm (13 led)
LED Pitch	7,69 mm
Reel length	25 m
Adhesive tape	<u>3M 9495LE</u>
Cable cross-section	0,75 mm ²

ORxxx-K252-13081H

Product Range

Version	Temperature	IP type	Strip length	PCB colour	Led/m	LED type	Manufacturer No.	Input voltage	Misc.
OR	300	K	2	5	213	0	8	1	H
OR	400	K	2	5	213	0	8	1	H

Packaging

Technical parameters	
Carton dimension	460 x 450 x 290 mm
Quantity per carton	10
Net weight	1340 g
Gross weight	1640 g



25 meters per carton roll



1 roll per carton box



250 m per carton

Orizzonte uses paper boxes and reels for its LED strips to fight for a plastic free world.

Certifications

