


ORxxx-K52-320S2

Electronic features



www.orizzonteled.com
info@orizzonteled.com

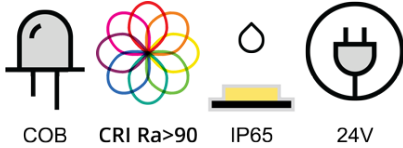


Technical parameters

LED Type	0620
LED/m	320
Voltage range	24V
Max power (24.0V)	9,6 W/m
Led color binning	5step MacAdam
Useful life span	20000h
Operating current (single LED)	20mA
Copper thickness	70 µm
Operating temperature	-10°C ~ +45°C
Max led temperature	65°C
IP rate	IP65
Emitting angle	120°

Lighting parameters

CCT	CRI	Rf	Rg	Lm/m	Lm/W	Energy rating
3000K (300)	CRI Ra>90	89	96	750	87	G
4000K (400)	CRI Ra>90	87	96	800	93	F

Dimensions

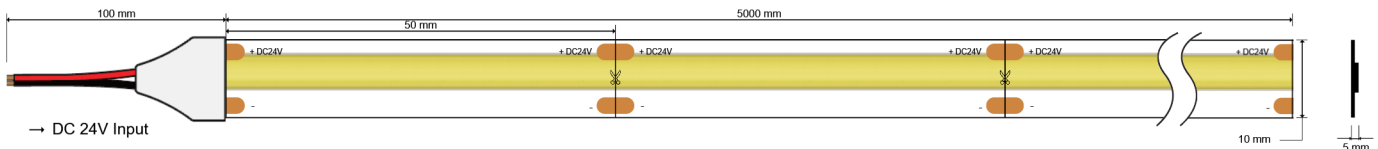

Specifications

PCB width	10 mm
Led strip height	5 mm
Cutting unit 24V	50 mm (16 led)
LED Pitch	3 mm
Reel length	5 m
Adhesive tape	3M 9495LE
Cable cross-section	0,75 mm ²

ORxxx-K52-320S2

Product Range

Version	Temperature	IP type	Strip length	PCB colour	Led/m	LED type	Manufacturer No.	Input voltage	Misc.
OR	300	K	5	2	320	O	S	2	
OR	400	K	5	2	320	O	S	2	

Packaging

Technical parameters

Carton dimension	525 x 215 x 430 mm
Quantity per carton	50
Net weight	315 g
Gross weight	335 g



5 meters per carton roll



1 roll per carton box

250 m per carton

Orizzonte uses paper boxes and reels for its LED strips to fight for a plastic free world.

Certifications

